

**WITH OPTIONAL  
FFT, BALANCING &  
TIME WAVEFORM**



# VIBSCANNER®

Data collection & machine diagnostics




**VIBCODE®  
compatible**

# The clever data collector for better maintenance

VIBSCANNER® is an offline condition monitoring system for predictive maintenance. Its comprehensive measurement and analysis functions and the convenient joystick for navigation make this handy instrument ideal for everyday inspection routines.

Totally compatible with the OMNI-TREND® PC software it gives analysis and reporting functions in an easy to understand format to prevent catastrophic machine failure, unplanned production downtime and consequential damage to process equipment.

## Trending




Use trend curves to follow the development of machine defects.

## Time waveform



Time signals and orbits detect damage in low-speed machines, gearboxes or turbo machinery.

## Machine diagnosis



FFT analysis with enveloping is provided for the diagnosis of machine condition, bearing condition and gear faults.

VIBSCANNER® is protected by a rugged, waterproof and dustproof case. An intrinsically safe version is also available.

## Well equipped

VIBSCANNER® measures the most important machine parameters on rotating equipment. All the sensors required are built into the instrument.

**Vibration\***

**Bearing condition**

**Temperature**

**RPM**

**Process parameters**

**FFT spectrum**

**Time waveform**

**Balancing**

\* Displacement  
Velocity  
Acceleration  
acc. to the new ISO 10816-3  
- even at frequencies down to 2 Hz



# VIBSCANNER®: One for all ...



## Sensors & interfaces

Measure important parameters directly. Use built-in transducers or external sensors attached to rugged connectors.

## ISO alarm display

Four LEDs for 'everything's OK' (blue), 'pre-warning' (green), 'warning' (yellow) and 'alarm' (red).

## Graphic display

Backlit screen with large intuitive symbols and text in different languages.


## Joystick navigation

Easy to use, simple to learn! One joystick and two function keys are all the operating controls you need - whether you are right or left-handed.

## Power to last

A practical quick-change rechargeable battery in the handle guarantees 8 hours of operation.

## Balancing



Allows one or two plane machine balancing in place.



# Take-along convenience - with built-in sensors!



## Up to speed?

Non-contact RPM measurement from distances up to 20 inches with no need for reflective tape – even in poor light. A bright red pointer beam helps in directing your aim at the rotating shaft.

## Takes the heat for you

The retractable, flexible temperature probe ensures optimal surface contact for quick, accurate readings – even in liquid. Or plug in an external probe – even IR temperature guns are available.

## Good vibrations

The rugged, patented accelerometer measures machine vibration as well as the high-frequency shock pulses emitted by anti-friction bearings and cavitating pumps – for a total of three different machine signals all at the same time.



## All the right connections

### - In -

Nearly any transducer (ICP®, CLD\*, Pt100, AC, DC,...) can be used to measure analog signals.

### - Out -

Data exchange with the PC, the measurement of digital trigger signals and the output of analog signals for headphones and analysis devices is carried out via the yellow interface.



## Unmistakable connectors

Color-coding of the input and output channels as well as the connecting cables prevents confusion.

\*CLD: Current LineDrive

# Data collection with VIBCODE® or 'MACHINE SCAN'



## Plug & Go

VIBCODE® collects routine machine data through the use of coded rings which identify the specific measurement point. This frees you from having to follow a route — take any point in any order without having to worry about identifying it properly! VIBCODE® stores the selected machines, locations and measurement tasks.

## Adaptive tasks




Measurement values are compared to alarm limits and stored. If alarm conditions arise, additional diagnostic measurements start automatically (e.g. spectrum).

## Electronic notepad

Next to measurement tasks, visual inspection tasks appear as a pick list for entry of inspection data. (e.g. 'Check belt tension')

## Easy data collection with 'machine scan'

Run through non-VIBCODE® measurement locations using a graphical path. VIBSCANNER® displays the next measurement point location with its direction of measurement. This prevents measurement locations from being overlooked or mixed up.



## Coded measurement locations



## Positive identification!


VIBCODE® is the world's first intelligent, field-tested transducer system to recognize its measurement locations automatically — at an unbeatably low price. The probe locks onto the measurement stud via bayonet mount and reads its encoded plastic ring. Then it reads the machine signals programmed for that location. VIBCODE® therefore delivers extremely reliable trending results by ensuring that the location, measurement direction and probe pressure are exactly the same each time.

The new VIBCODE® transducer now also measures signals on low-speed machines (as low as 2 Hz).

# Balancing in 1 and 2 planes




**Report function**  
Reports are very simple to compile and print out.

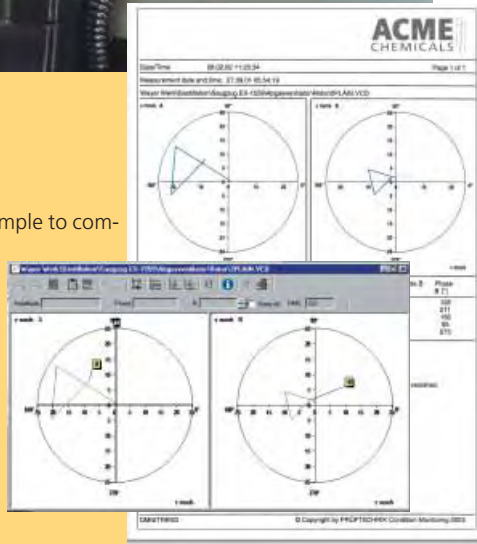

## Clear indication

After every measurement, the position and weight of the correction masses appear. The 'Smiley' shows that required balancing quality has been reached using built-in ISO Balancing Grade Tolerances.




## Flexible balancing

Correct unbalance with free mode, fixed correction locations (e.g. for blowers) or by tape measure positioning. Choose between adding masses or removing weight by boring into the rotor.




## Intuitive operation

Graphical step-by-step operator guidance for an extremely easy yet accurate balancing procedure.




# Diagnosis by FFT

**Also for bearings and gears**  
As well as normal spectra, VIBSCANNER® measures enveloped spectra to diagnose bearing and gear meshing problems. Spectra can be zoomed with the joystick, facilitating field evaluations.



## The correct setting

How to measure high-speed gears or low-speed machines? VIBSCANNER® has all the answers in optimized setups configured ahead of time.



# Analysis in detail



## Temporarily 'online'

Overall values or spectra can be recorded at scheduled times in order to identify the problems in troublesome machines - almost like an online system!



## Going into orbit

The movement of a rotating shaft is measured sequentially in both the X and Y axis and displayed as an orbit.

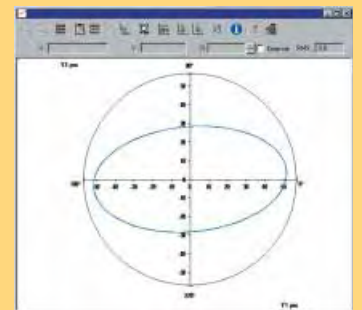


## Activating software

The optional balancing, analysis and FFT software are simple to activate in VIBSCANNER® by entering a password - without any changes to the hardware or any additional update programs.

**You can even try out 'FFT' and 'Analysis' for 30 hours of operation free-of-charge.**

# PC software for storage, analysis and reporting

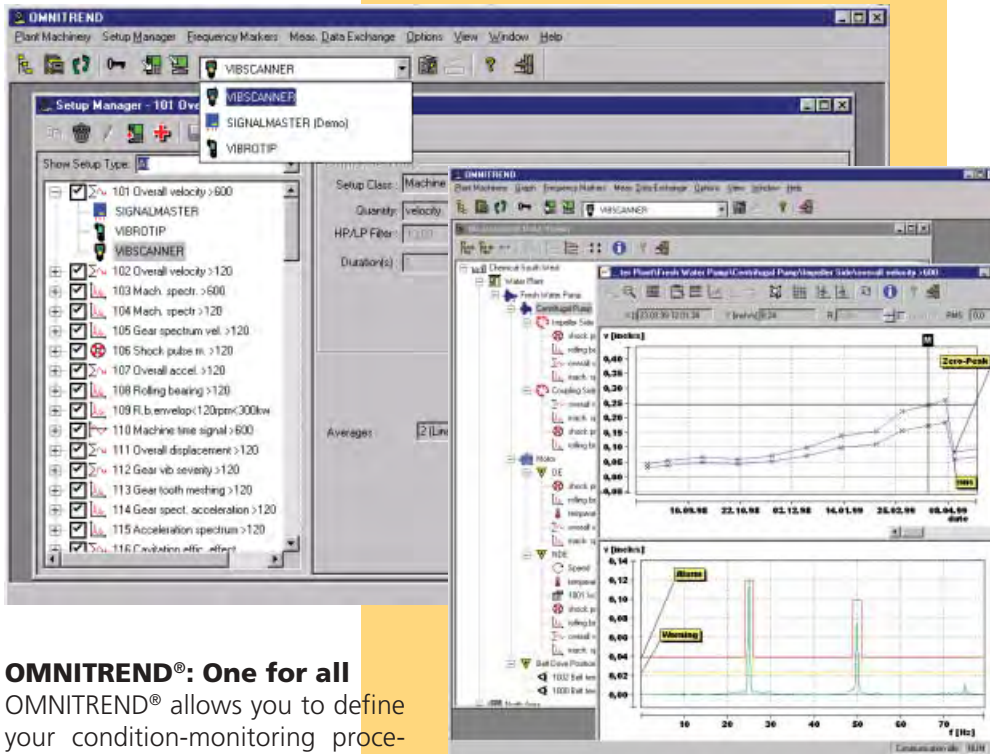

## OMNITREND®: One for all


OMNITREND® allows you to define your condition-monitoring procedure, to store and to analyze data, to create comprehensive reports and to communicate with all your PRÜFTECHNIK condition monitoring products such as: VIBROTIP®, VIBSCANNER® and VIBRONET® Signalmaster.

## Always in the picture

The clearly-structured database enables a quick localization of the measurement data. The data can then be visualized and combined in trend curves, spectra, time based signals or orbits.

## The right setting

Optimized settings for almost every measurement task are stored in OMNITREND®. The software knows which measurement instrument can use which set-up in order to avoid wrong settings.

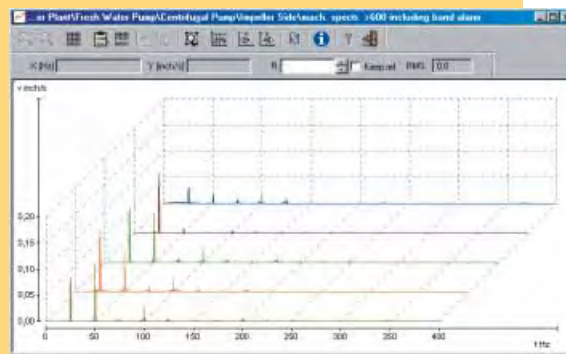


## A series of spectra

A spectra waterfall diagram makes it easy to see changes when looking at multiple spectra for data analysis.

## Off to the next round

Creating a VIBSCANNER® path is particularly easy as every machine can be represented graphically. Use 'drag & drop' to position measurement locations, which are then shown on the VIBSCANNER® display.

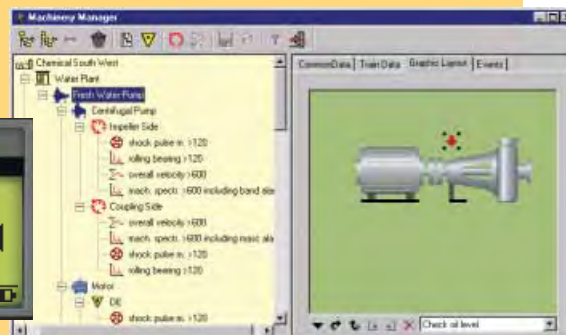

## Technical data

### Hardware

#### Measurement channels

Analog: Vibration signals (LineDrive, ICP®)  
Temperature (Pt100, NiCrNi)  
Transducer & instrument outputs  
AC ( $\pm 30V$ ; 0 - 20mA)<sup>1</sup>  
DC ( $\pm 30V$ ; 0 - 20mA)<sup>1</sup>  
Digital: Trigger (5V TTL)

#### Outputs

RS 232 (< 115 kbaud, PC connection), Head-  
phone, Analog signal (4V<sub>pp</sub>; R<sub>out</sub>= 200 Ohm)

#### Operating elements

1 joystick (Cursor & ENTER function)  
2 keys (Menu and Escape)

#### Display

Graphical pixel display (backgr. illumination)  
Dimensions 2.1 x 1.1inch / 128 x 64 px  
4 LEDs for status / signal evaluation

#### Power supply

NiMH recharge. battery with quick-change lock  
Electrical data 7.2V / 1.5Ah  
Charge dur. < 6 hours (intr. safe: <10 hours)  
Operat. dur. > 10 hours in intermit. use  
> 6 hours in continuous use  
with illumination



#### Internal sensors

Vibration/shock pulse (bearing condition)  
Frequency range  $\pm 10\%$  10Hz ... 10kHz<sup>3</sup>  
Resonance freq. 36 kHz<sup>3</sup>  
RPM (IR sensor with light point for adjustment)  
Temperature (NiCrNi)

#### Signal processing

r.m.s., 0-p, p-p, Max/Carpet, Envelope, Rectifi-  
cation  
Filter: Highpass: 2/10 Hz; 1/5 kHz  
Lowpass: 1/5/10<sup>2</sup>/40 kHz  
Integrat.: Two selectable stages  
Sampling frequencies: Up to 64 kHz (depend-  
ing on measuring range)

#### Memory

64 MB (intr. safe: 4 MB)

<sup>1</sup> not for intrinsically safe instruments

<sup>2</sup> optionally available for intrinsically safe instruments

<sup>3</sup> in 90° sinking

<sup>4</sup>CLD: Current line drive = amplifier with current output

<sup>5</sup> no power supply

#### Housing

Material ABS, reinforced with steel fiber  
Protect. class IP 65  
Rel. humidity 10 ... 90%; non condensing  
Dimension 9.8 x 3.9 x 2.2 inch (HxWxD)  
Weight approx. 24 oz.

#### Temperature range

Operation 32..140°F (intr. safe: 32..113°F)  
Storage -4..160°F (intr. safe: -4..113°F)

#### Measurement range / Accuracy

RPM 60 ... 60000 / 0.1%

Temperature  
Pt 100 -58 ... +1112°F / 1°+ sensor%  
NiCrNi (int.) -58...+212°F / 0.5° + 3%  
(ext.) -58...+212°F/ 0.5°+ sensor%  
(ext.) +212...1832°F / 1°+ sensor%

Extra low  
voltage  
(AC/DC) -9...+9V / 2% (R<sub>i</sub>=30kOhm,  
with cable VIB 5.440)  
-30...+30V / 2% (R<sub>i</sub>=100kOhm,  
with cable VIB 5.433)

Extra low  
current  
(AC/DC) -20...+20mA/ 2%; 4..20mA/ 2%  
(R<sub>in</sub>=200 Ohm, with cable  
VIB 5.434)

For internal sensor & external sensors (1μA/ms<sup>2</sup>  
CLD<sup>4</sup>; 100mV/g ICP®) and external measure-  
ment devices (1mV/ms<sup>2</sup>), the following applies:

Displacement up to 350 mils (p-p) / 1%  
Velocity up to 350 inch/s (p-p) / 1%  
Acceleration up to 600 g (p-p) / 1%  
Shock pulses up to 81 dBsv /  $\pm 3$  dB

#### Standards met

Frequency response according to ISO 2954 -  
other parameters and measured variables  
according to DIN 45662 class 1

#### Noise, internal sensor (from 10 Hz)

Velocity 0.1 mm/s eff.  
Displacement 2μm eff. (instr.+sensor)  
Shock pulse < 0dBsv, peak

#### Compatibility

External transducer  
Vibration

- CurrentLineDrive (CLD<sup>4</sup>) transducer
- ICP® transducer
- Velocity detection (mV/mms<sup>-1</sup>)
- Displacement detection (mV/μm)<sup>5</sup>

RPM

- Optical sensor (passive/active)
- 5V TTL (opt. or induct. transducer)

Temperature

- NiCrNi (magnetic/probe)
- IR probe
- Pt100<sup>1</sup>

#### Intrinsically safe version (option)

Ex em ib IIC T4 : TÜV 01 ATEX 1699



### Firmware

#### Measurement functions

Velocity / displacement / acceleration in ma-  
chine-specific measurement tasks;  
Shock pulse (bearing condition);  
Cavitation; Temperature; RPM

#### Time signal (optional)

f<sub>max</sub> 200/ 500/ 1000/ 2000/ 5000 Hz  
Meas. time [125 - 4000] ... [7.8 - 250] ms

#### Recording (overall values & spectra) (optional)

Start delay Adjustable  
Repetition Adjustable  
Waiting time Adjustable

#### FFT analysis (optional)

F<sub>max</sub> 0.1/ 0.2/ 0.4/ 1/ 5/ 10 kHz  
No. of lines 100 to 6400 lines  
Line width > 0.3 Hz

#### Balancing (optional)

1-plane/ sequential 2-plane balancing  
Balancing: Free mode, fixed location, fixed  
weight, tape measure, combine weights

#### Process parameters

Manual input  
User-defined tasks:  
DC:  $\pm 30V$ ; -20 ... +20mA  
AC:  $\pm 30V$ ; -20 ... +20mA  
(extra-low voltage/ current)

#### Data processing

Evaluation functions for characteristic overall  
value; Bearing diagnosis using shock pulse;  
Machine-condition evaluation according to ISO  
standards (vibration according to the new ISO  
10816-3); Data collection functions for charac-  
teristic overall value and for machine inspection;

#### Measurement parameters

Averaging Free run, linear, peak-hold,  
exponential, time synchronous;  
Adjustable averaging no. & time  
Meas. time: Adjustable  
Amplitude Autorange

#### Units

ISO and US units, switchable

#### Languages

English  
German  
Spanish  
French  
Italian  
Swedish  
Czech  
Dutch  
Polish  
....



Visit us at [www.ludeca.com](http://www.ludeca.com)

Visit us at [www.pruftechnik.com](http://www.pruftechnik.com)

#### LUDECA Inc.

1425 N.W. 88th Avenue  
Doral, FL 33172  
[www.ludeca.com](http://www.ludeca.com)  
Phone: (305) 591-8935  
Fax: (305) 591-1537  
eMail: [info@ludeca.com](mailto:info@ludeca.com)

Printed in Germany VIB 9.660.05.06.LUD  
VIBSCANNER® and VIBCODE® are registered trademarks of PRÜF-  
TECHNIK Dieter Busch AG. No copying or reproduction of this  
information, in any form whatsoever, may be undertaken  
without express written permission of PRÜFTECHNIK AG. The  
information contained in this leaflet is subject to change without  
further notice due to the PRÜFTECHNIK policy of continuous  
product development. PRÜFTECHNIK products are the subject of  
patents granted or pending throughout the world.  
© Copyright 2002 by PRÜFTECHNIK AG.

#### PRÜFTECHNIK

Condition Monitoring  
D-85730 Ismaning, Germany  
[www.pruftechnik.com](http://www.pruftechnik.com)  
Phone: +49 (0)89 99 61 60  
Fax: +49 (0)89 99 61 63 00  
eMail: [info@pruftechnik.com](mailto:info@pruftechnik.com)

Productive maintenance technology